

IPC-B122-APF28K-1NVR-104S3-P4-ECO

El **KIT-IPC-B122-APF28K-1NVR-104S3-P4-ECO** ofrece una solución completa y eficiente para proyectos de videovigilancia que requieren calidad, simplicidad en la instalación y funciones inteligentes a un costo competitivo. Diseñado para pequeñas empresas, hogares o comercios que buscan seguridad confiable desde el primer momento, este kit integra cámaras IP de alta definición con visión nocturna avanzada y micrófono incorporado, junto con un NVR compacto de 4 canales con tecnología PoE, que simplifica la conexión sin necesidad de fuentes de energía externas para cada cámara.

NVR-S3-P-ECO Series



Features

- Support Ultra 265/H.265/H.264 video formats
- 4/8-channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 6MP resolution recording
- Support cloud upgrade

Specifications

Model	NVR-104S3-P4-ECO	NVR-108S3-P8-ECO
Decoding		
Decoding Format	Ultra 265, H.265, H.264	

Decoding Capability	2 x 6MP@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 4 x 1080P@30	2 x 6MP@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 6 x 1080P@30, 8 x 720P@30
Decoding Capability Description	The resolution of each channel cannot exceed 4000 pixels in length and 3000 pixels in width	

Audio Compression	G.711A, G.711U	
Network		
Incoming Bandwidth	64 Mbps	
Outgoing Bandwidth	48 Mbps	
Max Users Can Be Added	32	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP, RTSP, IPv4	
Browser(Plugin)	IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+	
Video/Audio Input		
IP Video Input	4-ch	8-ch
Video/Audio Output		
Video Output	Support 1-ch HDMI, 1-ch VGA, HDMI and VGA simultaneous output	
HDMI Output	1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz	
VGA Output	1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz	
3.5mm Audio Output	1-ch	
Liveview Display	1/4	1/4/6/8/9
Corridor Mode Screen	3/4	3/4/5/7/9
Recording		
Recording Resolution	6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF	
Num of Concurrent Playback	8-ch	16-ch
Synchronous Playback in Local	4-ch	8-ch

Smart

VCA Detection by
IPC

SIP (Intrusion Detection, Cross Line Detection, Enter Area, Leave Area), Ultra Motion Detection (UMD)

VCA Search

Behavior Search

Smart by IPC

Total 4-ch (SIP and UMD supports channel 1-4, Alarm only, no image)

Alarm

General Alarm

Auto Tracking, Motion Detection, Human Body Detection, Video Loss, Alarm Input, Audio Detection

Alert Alarm

IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access

GUI Language

GUI Language

21 languages: Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian

Hard Disk

SATA

1 SATA Interface

Capacity

Up to 6 TB for each HDD (The maximum HDD capacity varies with environment temperature)

External Interface

Network Interface

1 RJ45 10 M/100 M self-adaptive Ethernet Interface

USB

Rear panel: 2 × USB2.0

Power Supply

DC 48 V/1 A

DC 48 V/1.35 A

PoE

PoE Interface

4 RJ45 10 M/100 M self-adaptive Ethernet Interface

8 RJ45 10 M/100 M self-adaptive Ethernet Interface

Max Power

Max 30 W for single port, Max 30 W in total

Max 30 W for single port, Max 45 W in total

Supported Standard

IEEE 802.3at, IEEE 802.3af

Working Environment

Working

Temperature

-10 °C to 55 °C (14 °F to 131 °F)

Working Humidity

≤ 90% RH (non-condensing)

Power Consumption
(without HDD)

≤ 9W

Dimensions


Weight (without
HDD)

≤ 1.0Kg (2.20lb)


Dimensions	190mm × 195mm × 42mm (7.5" × 7.7" × 1.6")
Certification	
Certification	CE; FCC; RoHS; WEEE
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035
FCC	Part15 Subpart B


Dimensions

Aggregate product size diagram using "main model" as an example

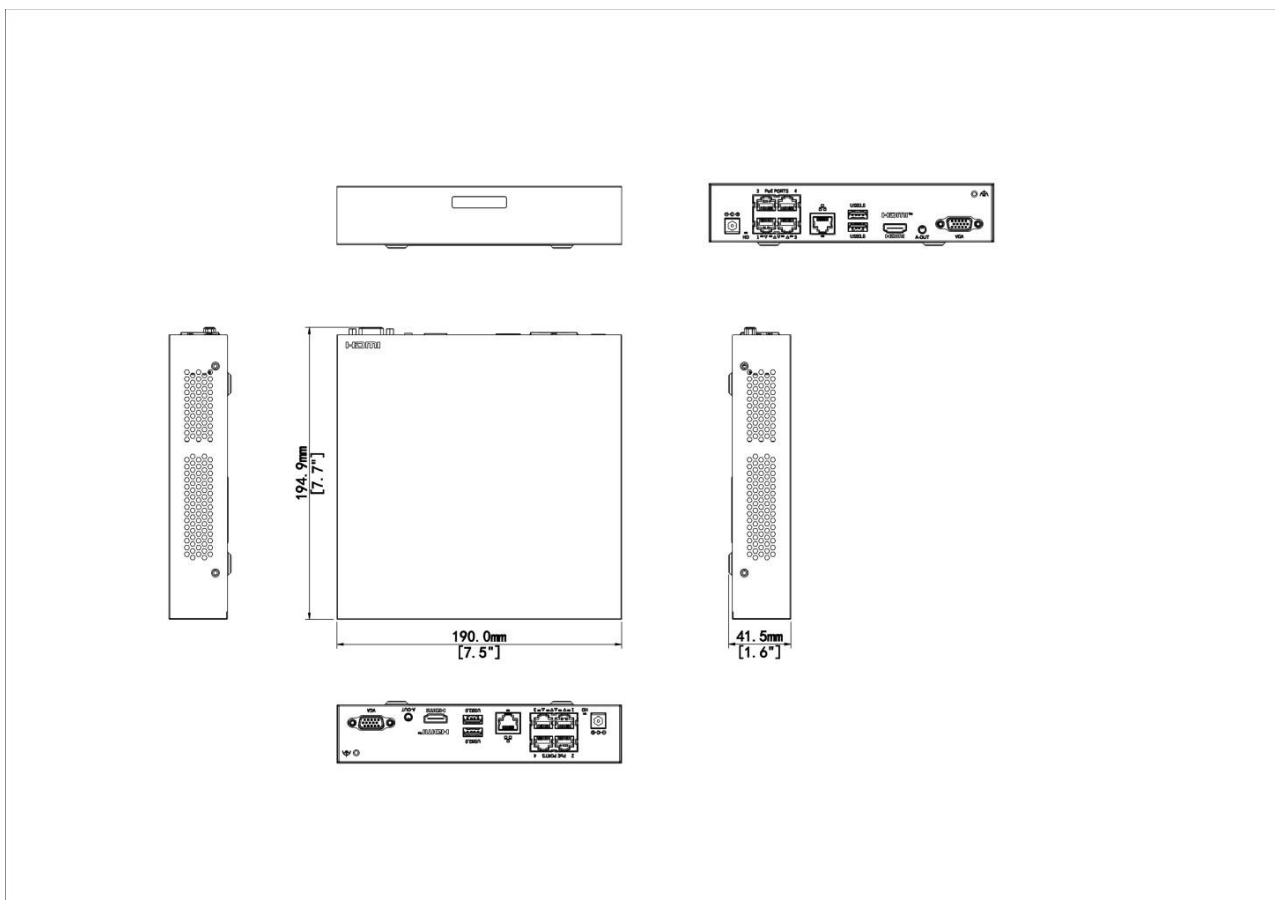

Rear Panel

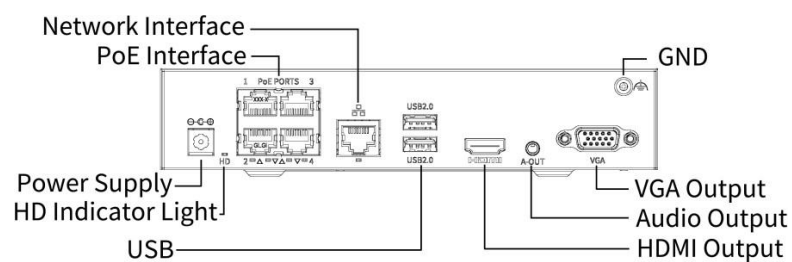

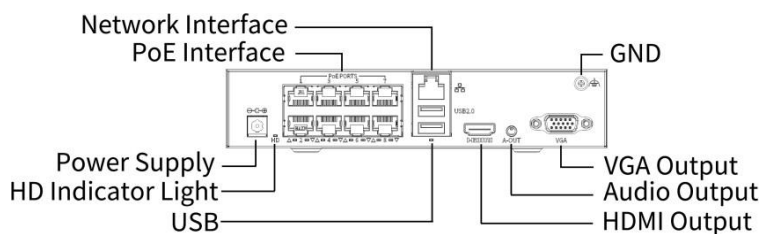

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.

2MP Mini Fixed Bullet Network Camera

IPC-B122-APF28(40)K



Key Features



- High quality image with 2MP, 1/2.9" CMOS sensor
- 2MP(1920*1080)@25/20fps; 720P (1280*720) @25/20fps
- Ultra 265, H.265, H.264
- 2D/3D DNR (Digital Noise Reduction)
- ROI (Region of Interest)
- ONVIF Conformance
- Smart IR, up to 30m (98ft) IR distance
- Support 128 GB Micro SD card
- 3-Axis
- Built-in Mic
- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- DC12V or PoE(IEEE 802.3af) power supply
- IP67




Specifications

	IPC-B122-APF28K		IPC-B122-APF40K		
Camera					
Sensor	1/2.9", 2.0 megapixel, progressive scan, CMOS				
Minimum Illumination	Colour: 0.02Lux (F2.1, AGC ON) 0Lux with IR on				
Day/Night	IR-cut filter with auto switch (ICR)				
Shutter	Auto/Manual, 1 ~ 1/100000s				
Adjustment angle	Pan: 0° ~ 360°		Tilt: 0° ~ 90°		Rotate: 0° ~ 360°
WDR	DWDR				
S/N	>52dB				
Lens					
Lens Type	2.8mm@F2.1		4.0mm@F2.1		
Iris	Fixed				
Angle of View (H)	101.1°		83.7°		
Angle of View (V)	55.0°		44.6°		
Angle of View (O)	111.0°		89.1°		
DORI					
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.8	45.0(147.6ft)	18.0(59.1ft)	9.0(29.5ft)	4.5(14.8ft)
	4.0	64.3(210.9ft)	25.7(84.4ft)	12.9(42.2ft)	6.4(21.1ft)
Illuminator					
IR Range	Up to 30m (98ft) IR range				
Wavelength	850nm				
IR On/Off Control	Auto/Manual				
Video					
Video Compression	Ultra 265, H.265, H.264				
H.264 code profile	Baseline profile, Main profile, High profile				
Frame Rate	Main Stream: 1080P (1920*1080), Max 25fps; 720P (1280*720), Max 25fps; Sub Stream: D1 (720*576), Max 25fps; 640*360,Max 25fps; 2CIF(704*288), Max 25fps; CIF(352*288), Max 25fps;				
Video Bit Rate	128 Kbps~6 Mbps				
U-code	Support				
OSD	Up to 4 OSDs				
Privacy Mask	Up to 4 areas				
ROI	Up to 8 areas				
Motion Detection	Up to 4 areas				
Video stream	Dual streams				
Image					
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2				
Digital Noise Reduction	2D/3D DNR				

Smart IR	Support
Flip	Normal/Vertical/Horizontal/180°
Dewarping	N/A
HLC	Support
BLC	Support
Defog	Digital Defog
Events	
Basic Detection	Motion detection, Audio detection
General Function	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication
Storage	
Edge Storage	Micro SD, up to 128 GB
Network Storage	ANR
Audio	
Audio Compression	G.711U, G.711A
Audio Bitrate	64 Kbps
Two-way Audio	N/A
Suppression	Support
Sampling Rate	8KHZ
Network	
Protocols	IPv4, IGMP, ICMP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, UPnP, HTTP, HTTPS, QoS, RTMP
Compatible Integration	ONVIF (Profile S, Profile T, Profile G), API
User/Host	Up to 32 users. 2 user levels: administrator and common user
Client	Uniarch Client Uniarch APP
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above
	Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above
Interface	
Audio I/O	N/A
Alarm I/O	N/A
Built-in Mic	Support
Built-in Speaker	N/A
WIFI	N/A
Network	1 * RJ45 10M/100M Base-TX Ethernet
Video Output	N/A
Certifications	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035) FCC (FCC 47 CFR part15 B)
Safety	CE LVD (EN 62368-1) CB (IEC 62368-1)
Environment	CE-RoHS (2011/65/EU; (EU)2015/863); WEEE (2012/19/EU)
Protection	IP67 (IEC 60529)

General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 3.2W
Dimensions (L × W × H)	160 × 62 × 65mm (6.3" × 2.4" × 2.6")
Weight	0.21kg (0.46lb)
Working Environment	-30°C~60°C (-22°F ~ 140°F) , Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C~60°C (-22°F ~ 140°F) , Humidity: ≤95% RH (non-condensing)
Surge Protection	4KV
Reset Button	N/A

Dimensions

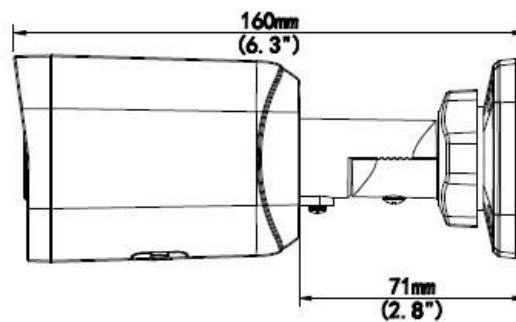

Accessories

TR-UP06-B-IN

Pole Mount



TR-JB05-A-IN

Junction Box



TR-UP06-C-IN

Pole Mount



TR-A01-IN

Waterproof Joint



www.uniview.com/uniarch

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

ENS-IP18CAT6

El patchcord UTP ENSON ENS-IP18CAT6 es una solución viable para poder instalar cámaras IP, CCTV y redes en proyectos domésticos o de oficina, donde solo se requiera cablear sin hacer trabajo de ductilería.



Especificaciones

Tipo	Patchcord UTP
Categoría	CAT6
Conductores	8/4 pares
Calibre conductor	28 AWG/7 hilos
Material conductor	100% Cobre
Material forro	PVC
Color	Gris
Medida	18 metros
Conectores	RJ45

