


DESCRIPTION

Category-5E Mold-Injection-Snagless
Patch Cord, 24 AWG Stranded, PVC Jacket.

FEATURES

- Bare Copper Stranded Conductors
- Unshielded RJ45 Modular Plugs
- 8P8C Gold Plated Pins
- 568B Wiring Color Code
- Designed to exceed ANSI/TIA-568-C.2
 Category 5E and ISO 11801 2nd Edition
 Class D+ standards
- RoHS Compliant, UL

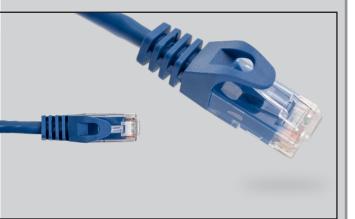

CATSE PATCH CABLE UNSHIELDED (BARE COPPER)

SKU: 092 SERIES

Conductor

Size 24AWG Stranded Material Bare Copper

Jacket

Material PVC, CM Rated Diameter 5.4±0.2mm

Operating Temperature -20°C to 60°C

Connectors

RJ45 8P/8C Gold Plated

RoHS Compliant Yes

Insulation Resistance Min. 5000 M Ω Km Conductor Resistance Max. 9.38 $\Omega/100$ m

Approvals

UL cUL Listed, ETL / 3P Certified ANSI/TIA-568-C.2 Category 5e standards.

Available in Black, Blue, Green, Gray, Orange, Purple, Red, White, Yellow.

Check availability with the Account Manager.







VERTICAL CABLE

951.696.7772 California 800.749.2447 Florida 845.391.8318 New York

www.verticalcable.com